


Properly Measuring Fitment for a Kirkey Racing™ Seat.

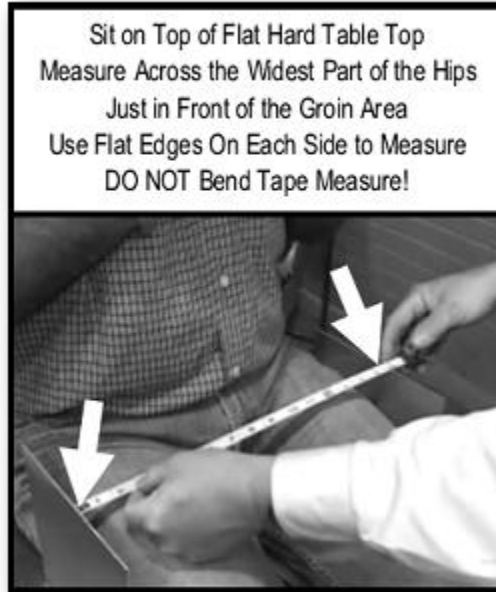

STEP ONE - DETERMINE SEATED HIP MEASUREMENT

Locate a Yard Stick or Metal Tape Measure and Record Hips Width in a Seated Position as Follows:

- The GENERAL RULE when sizing a racing seat is to MEASURE YOUR HIPS while in an upright natural position while sitting on a HARD surface with legs slightly apart. The person being measured can wear normal street clothes during this process, as a racing suit will just add to the snug fit needed for both driver comfort and safety. Be sure to remove bulky stuff from the pockets prior to the measuring session.
- All measurements MUST be taken in ABSOLUTE straight lines. Please use a yard stick or ideally, a tire stagger gauge. If you ONLY have a tape measure, DO NOT let it bend or follow the curves of the body in any way, as proper seat sizing and fitment will be compromised.
- Most STANDARD 'Off-The-Shelf' racing seats will probably fit a normal-sized driver perfectly. The racing seat manufacturers that Racecar Engineering™ represents have produced thousands of seats over the years and have optimized their production dimensions to fit almost every type of body.

STEP TWO - DETERMINE PROPER SEAT FOR YOUR RACING SERIES

Once you have that measurement, you can then choose a seat using the chart below. Simply find the type of car or series that you race, and you will see the series styles available, along with the range of standard production seat sizes using the hip measurement.